

EMC TEST REPORT

Applicant : Guangzhou Felicity Solar Technology Co., Ltd.

Address : No. 2, Donghua Huaye Road, Renhe Town, Baiyun Area, Guangzhou

Manufacturer : Guangzhou Felicity Solar Technology Co., Ltd.

Address : No. 2, Donghua Huaye Road, Renhe Town, Baiyun Area, Guangzhou

Factory : Guangzhou Felicity Solar Technology Co., Ltd.

Address : No. 2, Donghua Huaye Road, Renhe Town, Baiyun Area, Guangzhou

E.U.T. : Lithium Ion Battery

Brand Name : felicitysolar

Model No. : FLA48300

Standard : EN IEC 61000-6-1:2019

EN IEC 61000-6-2:2019 EN IEC 61000-6-3:2021 EN IEC 61000-6-4:2019

Date of Receiving

Samples

: Refer to page 4 of the report

Date of Test : Refer to page 4 of the report

Date of Report : August 19, 2024

This Test Report is Issued Under the Authority of:

Prepared by

Randi Wu / Engineer

Han Song / Authorized Signatory

This report shows that above equipment is technically compliant with the requirements of the standards above. All test results in this report apply only to the tested sample(s). Without prior written approval of Shenzhen Nore Testing Center Co., Ltd, this report shall not be reproduced except in full.

TEL: +86-755-33525266 Web: www.ntc-c.com
Address: South, No. 1, Building 10, Maqueling Industrial Zone, Nanshan
Shenzhen, Guangdong, 518057, China



TABLE OF CONTENTS

| 1. | SUMMARY OF TEST RESULTS | 5 |
|----|---|-----------|
| 2. | TEST UNCERTAINTY | 6 |
| 3. | GENERAL INFORMATION | 7 |
| | 3.1. Product Information | 7 |
| | 3.2. Description of Support Device | |
| | 3.3. Block Diagram of Test Setup | |
| | 3.4. Test Mode | |
| | 3.5. Test Conditions | |
| | 3.6. Sample Calculations | |
| | 3.7. Test Facility | |
| | 3.8. Abnormalities from Standard Conditions | |
| 4. | MEASURING DEVICES AND TEST EQUIPMENT | |
| | 4.1. For Radiated Emission Measurement | |
| | 4.2. For Electrostatic Discharge Test | |
| | 4.3. For Radio-Frequency Electromagnetic Field Test | 12 |
| | 4.4. For Fast transients test | |
| _ | CONDUCTED EMISSION MEASUREMENT | |
| Э. | | |
| | 5.1. Block Diagram of Test Setup | |
| | 5.2. Limit of Conducted Emission Measurement | |
| | 5.4. Test Results | |
| 6 | RADIATED EMISSION MEASUREMENT | |
| Ο. | | |
| | 6.1. Block Diagram of Test Setup | |
| | 6.3. Test Procedure | |
| | 6.4. Test Results | |
| 7 | HARMONIC CURRENT EMISSION MEASUREMENT | |
| • | 7.1. Block Diagram of Test Setup | |
| | 7.2. Test Limits | .23 23 |
| | 7.3. Test Procedure | |
| | 7.4. Test Results | |
| 8. | VOLTAGE FLUCTUATIONS & FLICKER MEASUREMENT | |
| • | 8.1. Block Diagram of Test Setup | |
| | 8.2. Test Limits | |
| | 8.3. Test Procedure | |
| | 8.4. Test Results | |
| 9. | PERFORMANCE CRITERIA FOR IMMUNITY | 27 |
| 10 |). ELECTROSTATIC DISCHARGE TEST | 28 |
| | 10.1. Block Diagram of Test Setup | |
| | 10.2. Test Standard and Severity Levels | |
| | 10.3. Test Procedure | |
| | 10.4. Test Results | .30 |
| 1 | I. RADIO-FREQUENCY ELECTROMAGNETIC FIELD TEST | 32 |
| | 11.1. Block Diagram of Test Setup | |
| | 11.2. Test Standard and Severity Levels | |
| | 11.3. Test Procedure | 33 |
| | 11.4. Test Results | 33 |
| 12 | 2. FAST TRANSIENTS TEST | 35 |

Shenzhen Nore Testing Center Co.,Ltd. Report No.: SZNTC2408085EV00



| 12.1. Block Diagram of Test Setup | |
|---|----|
| 12.2. Test Standard and Severity Levels | |
| 12.3. Test Procedure | |
| 12.4. Test Result | |
| 13. SURGE TEST | 38 |
| 13.1. Block Diagram of Test Setup | |
| 13.2. Test Standard and Severity Levels | 38 |
| 13.3. Test Procedure | |
| 13.4. Test Result | 39 |
| 14. RADIO-FREQUENCY COMMON MODE TEST | 40 |
| 14.1. Block Diagram of Test Setup | 40 |
| 14.2. Test Standard and Severity Levels | 40 |
| 14.3. Test Procedure | 41 |
| 14.4. Test Result | 41 |
| 15. POWER-FREQUENCY MAGNETIC FIELD TEST | 43 |
| 15.1. Block Diagram of Test Setup | 43 |
| 15.2. Test Standard and Severity Levels | |
| 15.3. Test Procedure | |
| 15.4. Test Result | |
| 16. VOLTAGE DIPS AND INTERRUPTIONS TEST | 45 |
| 16.1. Block Diagram of Test Setup | |
| 16.2. Test Standard and Severity Levels | |
| 16.3. Test Procedure | |
| 16.4. Test Result | |
| APPENDIX I (PHOTOS OF TEST SETUP) | 47 |
| APPENDIX II (PHOTOS OF E.U.T) | |
| AFFENDIA II (FNO 103 OF E.U. I) | |



Revision History of This Test Report

| Report Number | Description | Issued Date |
|------------------|--------------------|-------------|
| SZNTC2403199EV00 | Initial Issue | 2024-04-11 |
| SZNTC2408085EV00 | Derivative version | 2024-08-19 |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

Remark:

- 1. This report is a derivative version. The original report number was SZNTC2403199EV00. Compared to the original report, the new report changes the applicant, manufacturer, factory, product name, model, and trademark.
- 2. Through the evaluation of the above differences, there is no need to retest. All the data is from the original report.



1.SUMMARY OF TEST RESULTS

The E.U.T. has been tested according to the following specifications:

| EMISSION | | | | | | |
|--|---|---------|-------------------------|--|--|--|
| Standard | Test Type | Verdict | Remarks | | | |
| EN IEC 61000-6-3:2021 | Conducted Emission Measurement | N/A | See note 1 | | | |
| EN IEC 61000-6-4:2019 | Radiated Emission Measurement | PASS | Meets the requirements. | | | |
| EN IEC 61000-3-2:2019+A1:2021 | Harmonic Current Emission Measurement | N/A | See note 3 | | | |
| EN 61000-3-3:2013+A1:2019 +A2:2021 | Voltage Fluctuations & Flicker Measurement | N/A | See note 3 | | | |

| IMN | IMMUNITY(EN IEC 61000-6-2:2019/ EN IEC 61000-6-1:2019) | | | | | | | |
|--|--|---------|--------------------------------|--|--|--|--|--|
| Basic Standard | Test Type | Verdict | Result (Performance Criterion) | | | | | |
| IEC 61000-4-2:2008 | Electrostatic Discharge Test | PASS | A | | | | | |
| IEC 61000-4-3:2006+A1:2007 + A2:2010 | Radio-Frequency Electromagnetic Field Test | PASS | А | | | | | |
| IEC 61000-4-4:2012 | Fast transients test | PASS | A | | | | | |
| IEC 61000-4-5:2014 | Surge Test | N/A | See note 1 | | | | | |
| IEC 61000-4-6:2013 | Radio-Frequency Common Mode Test | PASS | А | | | | | |
| IEC 61000-4-8:2009 | Power-Frequency Magnetic Field Test | N/A | See note 2 | | | | | |
| IEC 61000-4-11:2004 | Voltage dips and interruptions | N/A | See note 3 | | | | | |

Note: 1: The device is used with an inverter, MPPT charger or UPS, so there is no need to evaluate the DC Port.

- 2: Applicable only to equipment containing devices susceptible to magnetic fields.
- 3: Only applicable to AC power supply devices.

Shenzhen Nore Testing Center Co.,Ltd. Report No.: SZNTC2408085EV00



2.TEST UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

| Test item | Uncertainty |
|--|-------------|
| Radiated Emission Measurement (30-1000MHz) | 3.9dB |

Note: As Ulab in all applicable tests listed above are less than Ucispr according to CISPR 16-4-2, compliance is deemed to occur if no measured disturbance exceeds the disturbance limit; non-compliance is deemed to occur if any measured disturbance exceeds the disturbance limit.



3.GENERAL INFORMATION

3.1.Product Information

| E.U.T.: | Lithium Ion Battery |
|-----------------------------|--|
| Model No.: | FLA48300 |
| E.U.T Type: | Such equipment would fulfil the tighter emission requirements of the residential environment as well as the severe immunity requirements of the industrial environment. |
| Typical arrangement: | Floor-standing |
| Highest Internal Frequency: | Below 108MHz (Highest internal frequency below 108MHz, radiation test frequency range 30MHz-1000MHz) |
| Rating: | Nominal Voltage: 51.2V Energy: 15kWh Operating Voltage: 44.8-57.6V Recommend Charge/Discharge Current: ≤150A Recommend Charge/Discharge Power: ≤7500W |
| Cable: | The communication line used in test is a shielded line which is a combination of USB to RS232 line, RS232 to RS485 converter and RS485 line. The USB to RS232 line is 1.5m length. The RS485 line is 2.08m length. |
| Sample No.: | SZNTC2403199EV00-001 |
| Remark: | All the information above is provided by the manufacturer. For more detailed features of the EUT, please refer to the user manual. |



3.2.Description of Support Device

| No. | Equipment | Manufacturer | M/N | S/N | Cable Specification |
|-----|-----------|--------------|------------------|-----|------------------------|
| 1 | DC Source | ITECH | IT6018PV-1500-40 | N/A | |
| 2 | Laptop | Lenovo | XB-20210630LNPM | N/A | |


Remark: The above equipment is provided by the laboratory for testing purposes.

3.3.Block Diagram of Test Setup

(1) Charging Mode



(2) Discharging mode



3.4.Test Mode

| No. | Test Mode | Remark | | |
|-----|------------------|--------------------------------------|--|--|
| 1. | Charging Mode | Charged by Power source | | |
| 2. | Discharging Mode | Connect cement resistor to discharge | | |



3.5.Test Conditions

| No. | Test Item | Test Mode | Test Voltage | Tested by | Remarks |
|-----|--|--------------|--------------|-----------|---------------|
| 1. | Conducted Emission - AC power input port | | | | |
| 2. | Conducted Emission - AC power output port | | | | |
| 3. | Conducted Disturbances - Wired network port or signal / control port | | | | |
| 4. | Radiated Emission | 1-2 | DC 51.2V | YXH | See note 1, 4 |
| 5. | Harmonic Current Emission | | | | |
| 6. | Voltage Fluctuations & Flicker | | | | |
| 7. | Electrostatic Discharges (ESD) | 1-2 | DC 51.2V | CRB | See note 2, 4 |
| 8. | Radio-Frequency Electromagnetic Field | 1-2 | DC 51.2V | Chance | See note 1, 4 |
| 9. | Fast transients test | 1-2 | DC 51.2V | CRB | See note 1, 4 |
| 10. | Surges | | | | |
| 11. | Radio-Frequency Common Mode Test | 1-2 | DC 51.2V | Chance | See note 1, 4 |
| 12. | Power Frequency Magnetic Field | | | | |
| 13. | Voltage dips and interruptions | | | | |

Note:

- 1. The testing climatic conditions for temperature, humidity, and atmospheric pressure are within: 15~35°C, 30~70%, 86~106kPa.
- 2. The testing climatic conditions for temperature, humidity, and atmospheric pressure are within: 15~35°C, 30~60%, 86~106kPa.
- 3. Only the worst data were recorded on the report.
- 4. Only the most stringent limits were recorded on the report.

(This product is suitable for industrial environment, also suitable for residential environment, we use most stringent standards EN IEC 61000-6-3 and EN IEC 61000-6-2 for testing.)



3.6. Sample Calculations

| | Conducted Emission | | | | | | |
|----------------|--------------------|-------------------|-----------------|-----------------|----------------|----------|--|
| Freq. (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | |
| 0.2260 | 11.56 | 12.50 | 24.06 | 66.00 | -41.94 | AVG | |

Where,

Freq. = Emission frequency in MHz

Reading Level = Spectrum Analyzer/Receiver Reading

Corrector Factor = Insertion loss of LISN + Cable Loss + RF Switching Unit attenuation

Measurement = Reading + Corrector Factor
Limit = Limit stated in standard
Margin = Measurement - Limit

Detector = Reading for Quasi-Peak / Average / Peak

| | Radiated Emission | | | | | | |
|----------------|-------------------|-------------------|-------------------|-------------------|-------------|----------|--|
| Freq. (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | |
| 75.9773 | -17.06 | 59.36 | 42.30 | 49.00 | -6.70 | QP | |

Where,

Freq. = Emission frequency in MHz

Reading = Spectrum Analyzer/Receiver Reading

Factor = Antenna Factor + Cable Loss - Pre-amplifier

Level = Reading + Factor

Limit = Limit stated in standard

Margin = Margin, which calculated by Level - Limit

Detector = Reading for Quasi-Peak / Average / Peak



3.7.Test Facility

| Test Site: | Shenzhen Nore Testing Center Co., Ltd. |
|---------------------|---|
| Accreditations and | Listed by CNAS, May 18, 2024 |
| Authorizations: | The certificate is valid until May 17, 2030 |
| | The Laboratory has been assessed and proved to be in compliance |
| | with CNAS/CL01 |
| | The Certificate Registration Number is L11038. |
| Test Site Location: | South, No. 1, Building 10, Maqueling Industrial Zone, Nanshan |
| | Shenzhen, Guangdong, 518057, China |
| Subcontractor: | Dongguan Nore Testing Center Co.,Ltd. |
| Test Site Location: | Building D, Gaosheng Science and Technology Park, Hongtu Road, |
| | Nancheng District, Dongguan City, Guangdong Province, China |
| Test Items: | Radio-Frequency Electromagnetic Field |
| | Radio-Frequency Common Mode Test |

3.8. Abnormalities from Standard Conditions

None



4.MEASURING DEVICES AND TEST EQUIPMENT

4.1.For Radiated Emission Measurement

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|--------------------------------|-----------------|-------------------------|------------|---------------|------------------|
| 1. | Test Receiver | Rohde & Schwarz | ESPI-7 | 100006 | Mar. 22, 2024 | 1 Year |
| 2. | Loop Antenna | ZHINAN | ZN30900C | 16036 | Mar. 23, 2024 | 2 Year |
| 3. | Composite logarit hmic antenna | SCHWARZBECK | VULB 9163 | 1633 | Mar. 23, 2024 | 2 Year |
| 4. | Horn Antenna | SCHWARZBECK | BBHA 9120 D | 01884 | Mar. 23, 2024 | 2 Year |
| 5. | Power Amplifier | HP | HP 8447D | 2443A04646 | Mar. 23, 2024 | 1 Year |
| 6. | Power Amplifier | KSYET | PAM-118 | 443007 | Mar. 22, 2024 | 1 Year |
| 7. | Test Software | EZ | EZ-EMC (Ver. CT3A11) | N/A | N/A | N/A |

4.2.For Electrostatic Discharge Test

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|------------|--------------|-----------|------------|---------------|------------------|
| 1. | ESD Tester | HAEFELY | ONYX16 | 1811981 | Mar. 23, 2024 | 1 Year |

4.3.For Radio-Frequency Electromagnetic Field Test

(Dongguan Nore Testing Center Co., Ltd.)

| | \ 33 | | | | | |
|------|------------------|--------------------|---------------------|------------|---------------|------------------|
| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
| 1. | Signal Generator | Agilent | N5181A | MY47070160 | Mar. 13, 2024 | 1 Year |
| 2. | RF Switch | SKET | N/A | N/A | N/A | N/A |
| 3. | Power Amplifier | SKET | HAP801000M_25 0W | 201804008 | N/A | N/A |
| 4. | Power Amplifier | SKET | HAP0103G_75W | 201804009 | N/A | N/A |
| 5. | Power Amplifier | SKET | HAP0306G_50W | 201804010 | N/A | N/A |
| 6. | Power Meter | Agilent | E4419B | GB40201469 | Mar. 13, 2024 | 1 Year |
| 7. | Power Sensor | Agilent | E9304A | MY41498919 | Mar. 13, 2024 | 1 Year |
| 8. | Power Sensor | Agilent | E9300A | US39211259 | Mar. 13, 2024 | 1 Year |
| 9. | E-Field Probe | Narda | EP-601 | N/A | Mar. 23, 2024 | 1 Year |
| 10. | Antenna | Schwarzbeck | STLP 9129 | 9129071 | N/A | N/A |
| 11. | Audio Analyzer | Rohde & Schwarz | UPV | 100894 | Mar. 13, 2024 | 1 Year |
| 12. | Test Software | SKET | SKET_RS | N/A | N/A | N/A |



4.4.For Fast transients test

| Ite | m Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|-----|----------------|--------------|------------------|------------|---------------|------------------|
| 1 | Burst Tester | HAEFELY | AXOS5 | 177723 | Mar. 22, 2024 | 1 Year |
| 2 | Coupling Clamp | HAEFELY | N/A | N/A | Mar. 22, 2024 | 1 Year |
| 3 | Test Software | VNC | VNC Viewer 5.0.5 | N/A | N/A | N/A |


4.5.For Radio-Frequency Common Mode Test (Dongguan Nore Testing Center Co., Ltd.)

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|--------------------------|-----------------|------------|------------|---------------|------------------|
| 1. | Signal generator | IFR | 2023A | 2023051280 | Mar. 13, 2024 | 1 Year |
| 2. | Power Amplifier | SCHAFFNER | CBA9425 | 1022 | N/A | N/A |
| 3. | 6dB 50Watt Attenuator | SCHAFFNER | ATN6025 | N/A | Mar. 13, 2024 | 1 Year |
| 4. | CDN | Lioncel | CDN-M3-16 | 0170703 | Mar. 13, 2024 | 1 Year |
| 5. | CDN | Lioncel | CDN-M2-16 | 0170708 | Mar. 13, 2024 | 1 Year |
| 6. | CDN | CDSI | ADN-M5/AF5 | 8105001 | Mar. 13, 2024 | 1 Year |
| 7. | EM Clamp | CDSI | EMCL-22 | 8192007 | Mar. 13, 2024 | 1 Year |
| 8. | Directional Coupler | SCHAFFNER | 255 | 19184 | Mar. 13, 2024 | 1 Year |
| 9. | Audio Analyzer | Rohde & Schwarz | UPV | 100894 | Mar. 13, 2024 | 1 Year |
| 10. | Test Software | EZ | EZ_CS | N/A | N/A | N/A |



5.CONDUCTED EMISSION MEASUREMENT

5.1.Block Diagram of Test Setup

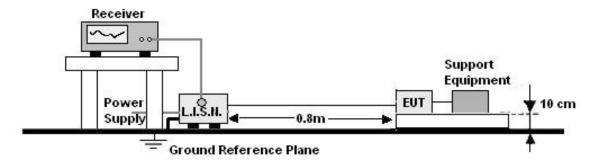

5.2.Limit of Conducted Emission Measurement

⊠ Residential Environment Limit

| 1 toolaontiai E | | | | | | | |
|---------------------------|------------|-----------|----------------|-----------|------------|-----------|-----------|
| Frequency range | | | Limits dB (μV) | | | | |
| MHz | ☐ AC Ma | ins Port | ☐ DC P | ower Port | ☐ Other V | Vire Port | Detector |
| | Quasi-peak | Average | Quasi-peak | Average | Quasi-peak | Average | type / |
| | | | | | | | bandwidth |
| 0,15 to 0,50 ^b | 66 to 56ª | 56 to 46ª | 79 | 66 | 84 to 74ª | 74 to 64ª | |
| 0,50 to 5,0 ^b | 56 | 46 | | | _, | | 9 kHz |
| 5,0 to 30,0 | 60 | 50 | 66 | 60 | 74 | 64 | |

a The limits decrease linearly with the logarithm of the frequency.

b The lower limit shall apply at the transition frequency.



- a. The EUT was placed on a wooden table 0.1m height from the metal ground plan and 0.4m from the conducting wall of the shielding room and it was kept at 0.8m from any other grounded conducting surface.
- b. Configure the EUT and support devices as per section 5.1.
- c. All cables and support devices were positioned as per EN IEC 61000-6-3.
- d. Connect mains power port of the EUT to a line impedance stabilization network (LISN). Wired network port to Asymmetric Artificial Network (AAN).
- e. Connect all support devices to the other LISN and AAN, if needed.
- f. Turn on the EUT and all support devices, and make it run stably.
- g. Set the detector and measurement bandwidth of test-receiver system as per EN IEC 61000-6-3.
- h. Scan the frequency range from 150KHz to 30MHz at each side of AC line for conducted interference checking
- i. Repeat the above scans in each mode and record the test data.


5.4.Test Results

N/A



6.RADIATED EMISSION MEASUREMENT

6.1.Block Diagram of Test Setup

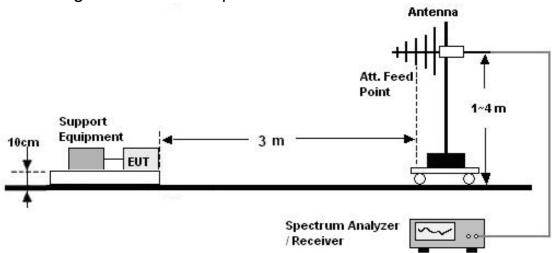

6.2.Limit of Radiated Emission Measurement

⊠ Below 1 GHz:

| Frequency range | Quasi-pe dB(μ\ | Distance | Detector type | |
|-----------------|--|----------|---------------|----------------|
| MHz | ⊠ Residential □ Industrial Environment Environment | | m | / Bandwidth |
| 30 to 230 | 40 | 50 | 3 | 120 KHz |
| 230 to 1000 | 47 | 57 | 3 | 120 KHz |

Note: The lower limit shall apply at the transition frequency.

Shenzhen Nore Testing Center Co.,Ltd. Report No.: SZNTC2408085EV00



☐ Above 1 GHz :

| Frequency range | ☐ Residentia | al Environment | _ | lustrial nment | Distance | Detector |
|-----------------|---|----------------|----|------------------------|----------|----------|
| MHz | Peak limits Average limits Peak limits Average limits $ dB(\mu V/m) \qquad dB(\mu V/m) \qquad dB(\mu V/m) $ | | m | type / Bandwidth | | |
| 1000 to 3000 | 76 | 56 | 70 | 50 | 3 | 1MHz |
| 3000 to 6000 | 80 | 60 | 74 | 54 | 3 | 1MHz |

Required highest frequency for radiated measurement

| | Highest internal frequency* (F _x) | Highest measured frequency |
|------|---|--|
| | F _x ≤ 108 MHz | 1 GHz |
| | 108 MHz < F _x ≤ 500 MHz | 2 GHz |
| | 500 MHz < F _x ≤ 1 GHz | 5 GHz |
| | F _x > 1 GHz | $5 \times F_x$ up to a maximum of 6 GHz |
| Note | F_x is highest fundamental frequence which it operates. | y generated or used within the EUT or highest frequency at |
| | 2. Where the F_x is not known, tests are | performed up to 6 GHz. |



- a. The EUT was placed on a rotatable wooden table top 0.1m above ground.
- b. The EUT was set 3m away from the receiving antenna which was mounted on the top of a variable height antenna tower.
- c. Configure the EUT and support devices as per section 6.1.
- d. All cables and support devices were positioned as per EN IEC 61000-6-3.
- e. Connect mains power port of the EUT to the outlet socket under the turntable and connect all other support devices to other outlet socket under the turntable.
- f. Turn on the EUT and all support devices, and make it run stably.
- g. Set the detector and measurement bandwidth of test-receiver system as per EN IEC 61000-6-3.
- h. Scan the frequency range from 30MHz to 1000MHz for radiation emissions checking.
- i. Emissions were scanned and measured rotating the EUT from 0 to 360 degrees and positioning the antenna from 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- j. Repeat the above scans in each mode and channel and record the test data.


6.4.Test Results

PASS.

Please refer to the following pages.




| E.U.T: | Lithium Ion Battery | Model Name: | FLA48300 |
|--------------|---------------------|--------------------|------------|
| Temperature: | 23.5°C | Relative Humidity: | 58% |
| Pressure: | 1031hPa | Test Voltage: | DC 51.2V |
| Test Mode: | Charging mode | Ant. Polarization: | Horizontal |
| Test Date: | 2024-04-11 | | |

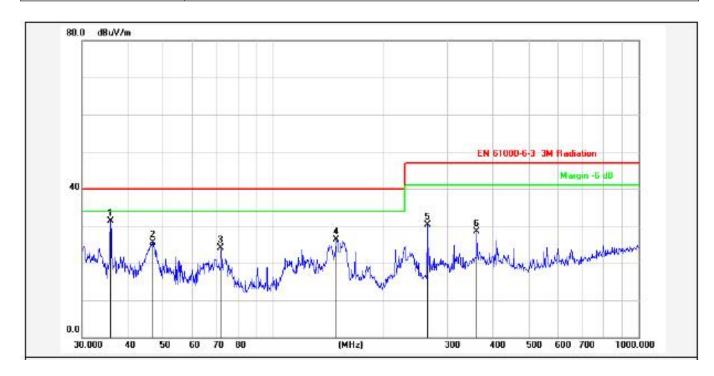

| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|--------------------|------------------|-------------------|-------------------|-------------------|----------------|----------|-------------|-------------------|-----|--------|
| 1 | 35.8746 | -12.78 | 44.13 | 31.35 | 40.00 | -8.65 | peak | 8 | | Р | |
| 2 | 46.8303 | -10.46 | 35.94 | 25.48 | 40.00 | -14.52 | peak | | | Р | |
| 3 | 71.8320 | -15.09 | 39.12 | 24.03 | 40.00 | -15.97 | peak | | 8 8 | Р | |
| 4 | 148.9625 | -15.74 | 42.13 | 26.39 | 40.00 | -13.61 | peak | No. | | Р | |
| 5 | 263.8190 | -11.38 | 41.76 | 30.38 | 47.00 | -16.62 | peak | | | Р | |
| 6 | 360.4476 | -9.14 | 37.57 | 28.43 | 47.00 | -18.57 | peak | | | Р | |




| E.U.T: | Lithium Ion Battery | Model Name: | FLA48300 |
|--------------|---------------------|--------------------|----------|
| Temperature: | 23.5°C | Relative Humidity: | 58% |
| Pressure: | 1031hPa | Test Voltage: | DC 51.2V |
| Test Mode: | Charging mode | Ant. Polarization: | Vertical |
| Test Date: | 2024-04-11 | | |

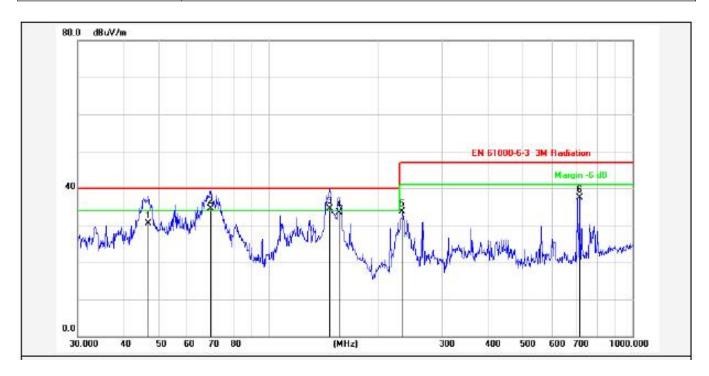

| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | The second secon | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|--------------------|------------------|-------------------|--|-------------------|----------------|----------|----------------|----------------|-----|--------|
| 1 | 46.8303 | -10.46 | 41.06 | 30.60 | 40.00 | -9.40 | QP | | | Р | |
| 2 | 69.3568 | -14.24 | 48.74 | 34.50 | 40.00 | -5.50 | QP | | | Р | 9 |
| 3 | 147.4036 | -15.74 | 50.24 | 34.50 | 40.00 | -5.50 | QP | | | Р | |
| 4 | 156.4578 | -15.49 | 48.99 | 33.50 | 40.00 | -6.50 | QP | | | Р | |
| 5 | 233.3486 | -12.25 | 45.99 | 33.74 | 47.00 | -13.26 | peak | | | Р | |
| 6 | 716.6820 | -3.25 | 40.83 | 37.58 | 47.00 | -9.42 | peak | | | Р | |




| E.U.T: | Lithium Ion Battery | Model Name: | FLA48300 |
|--------------|---------------------|--------------------|----------|
| Temperature: | 23.5°C | Relative Humidity: | 58% |
| Pressure: | 1031hPa | Test Voltage: | DC 51.2V |
| Test Mode: | Discharging mode | Ant. Polarization: | Vertical |
| Test Date: | 2024-04-11 | | |

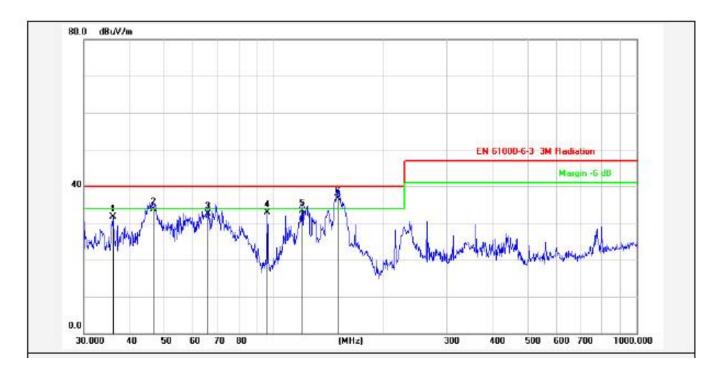

| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|--------------------|------------------|-------------------|-------------------|-------------------|----------------|----------|-------------|----------------|-----|--------|
| 1 | 36.0007 | -12.74 | 44.41 | 31.67 | 40.00 | -8.33 | peak | | | Р | |
| 2 | 46.6664 | -10.46 | 44.16 | 33.70 | 40.00 | -6.30 | QP | | 92 | Р | 8 |
| 3 | 66.0342 | -12.84 | 45.44 | 32.60 | 40.00 | -7.40 | QP | | | Р | |
| 4 | 95.7622 | -12.70 | 45.67 | 32.97 | 40.00 | -7.03 | peak | | | Р | 7 |
| 5 | 119.8556 | -13.80 | 47.20 | 33.40 | 40.00 | -6.60 | QP | | | Р | |
| 6 | 150.0108 | -15.74 | 52.44 | 36.70 | 40.00 | -3.30 | QP | | 0 | Р | 3 |



| E.U.T: | Lithium Ion Battery | Model Name: | FLA48300 |
|--------------|---------------------|--------------------|------------|
| Temperature: | 23.5°C | Relative Humidity: | 58% |
| Pressure: | 1031hPa | Test Voltage: | DC 51.2V |
| Test Mode: | Discharging mode | Ant. Polarization: | Horizontal |
| Test Date: | 2024-04-11 | | |

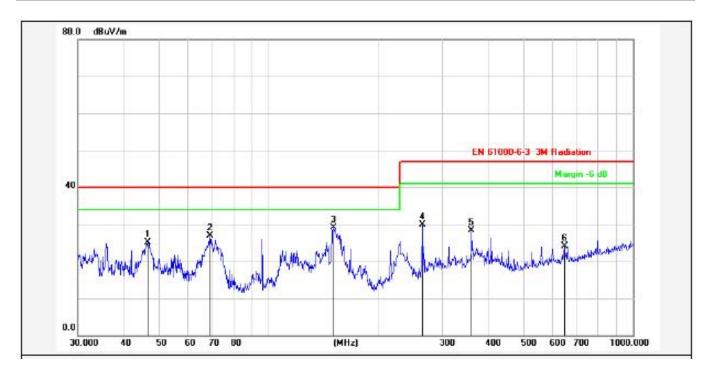


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|--------------------|------------------|-------------------|-------------------|-------------------|----------------|----------|-------------|----------------|-----|--------|
| 1 | 46.6664 | -10.46 | 35.63 | 25.17 | 40.00 | -14.83 | peak | | | Р | |
| 2 | 69.1141 | -14.15 | 41.09 | 26.94 | 40.00 | -13.06 | peak | | | Р | |
| 3 | 150.5378 | -15.72 | 44.87 | 29.15 | 40.00 | -10.85 | peak | | | Р | |
| 4 | 263.8190 | -11.38 | 41.20 | 29.82 | 47.00 | -17.18 | peak | | | Р | |
| 5 | 360.4476 | -9.14 | 37.42 | 28.28 | 47.00 | -18.72 | peak | | | Р | |
| 6 | 647.3856 | -3.95 | 28.06 | 24.11 | 47.00 | -22.89 | peak | | 2 | Р | |



7.HARMONIC CURRENT EMISSION MEASUREMENT

7.1.Block Diagram of Test Setup

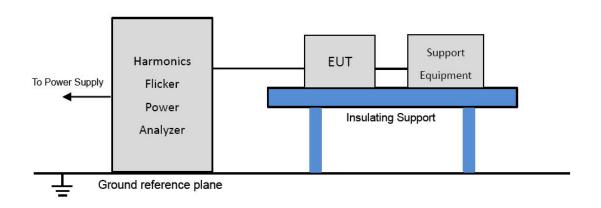

7.2.Test Limits

□ Limits for Class A equipment

| Max. permissible harmonics current | | | | | |
|------------------------------------|--|--|--|--|--|
| A | | | | | |
| dd harmonics | | | | | |
| 2.30 | | | | | |
| 1.14 | | | | | |
| 0.77 | | | | | |
| 0.40 | | | | | |
| 0.33 | | | | | |
| 0.21 | | | | | |
| 0.15×15/h | | | | | |
| en harmonics | | | | | |
| 1.08 | | | | | |
| 0.43 | | | | | |
| 0.30 | | | | | |
| 0.23×8/h | | | | | |
| | | | | | |

☐ For Class B equipment:

The harmonics of the input current shall not exceed the values given in Class A equipment multiplied by a factor of 1,5.



☐ Limits for Class C equipment ^a

| Harmonics Order h | Maximum permissible harmonic current expressed as a percentage of the input current at the fundamental frequency | | | |
|------------------------------------|--|--|--|--|
| O | dd harmonics | | | |
| 2 | 2 | | | |
| 3 | 27 b | | | |
| 5 | 10 | | | |
| 7 | 7 | | | |
| 9 | 5 | | | |
| 11 <= h <= 39 (odd harmonics only) | 3 | | | |

a For some Class C products, other emission limits apply (see 7.4).

☐ Limits for Class D equipment

| Harmonics Order | Max. permissible | Max. permissible | | | | | |
|----------------------|-----------------------|-------------------|--|--|--|--|--|
| | harmonics current per | harmonics current | | | | | |
| | watt | | | | | | |
| h | | A | | | | | |
| | mA/W | | | | | | |
| 3 | 3.4 | 2.30 | | | | | |
| 5 | 1.9 | 1.14 | | | | | |
| 7 | 1.0 | 0.77 | | | | | |
| 9 | 0.5 | 0.40 | | | | | |
| 11 | 0.35 | 0.33 | | | | | |
| 13 | 0.30 | 0.21 | | | | | |
| 15<= <i>h</i> <=39 | 3.85/h | 0.15×15/h | | | | | |
| (Odd harmonics only) | 0.00/11 | 0.15.15/11 | | | | | |

For the following categories of equipment limits are not specified in this edition of the standard.

Note: Equipment with a rated power of 75W or less, other than lighting equipment.

The E.U.T. is classified as follows:

Class A:

Balanced three-phase equipment, Household appliances excluding equipment as Class D, Tools excluding portable tools, Dimmers for incandescent lamps, audio equipment ,equipment not specified in one of the three other classes.

Class B:

Portable tools; Arc welding equipment which is not professional equipment.

Class C:

Lighting equipment.

Class D:

Equipment having a specified power less than or equal to 600W of the following types: Personal computers and personal computer monitors and television receivers.

The limit is determined based on the assumption of modern lighting technologies having power factors of 0,90 or higher.



- a. The EUT was placed on a wooden table 0.8m above ground.
- b. Configure the EUT and support devices as per section 7.1.
- c. Turn on the EUT and all support devices, and make it run stably.
- d. Set the EUT to produce the maximum harmonic components under normal operating conditions for each successive harmonic component in turn.
- e. Set correspondent test program and measurement time of the test system to measure the current harmonics emanated from EUT, and then record the test data.


7.4.Test Results

N/A



8.VOLTAGE FLUCTUATIONS & FLICKER MEASUREMENT

8.1.Block Diagram of Test Setup

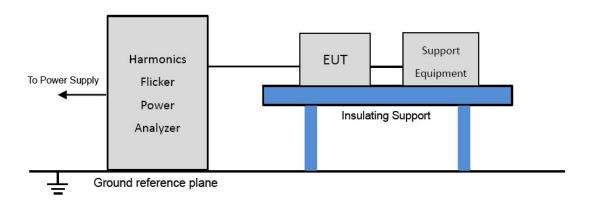

8.2.Test Limits

| Test Item | Limit |
|---|-------|
| P _{st} (Short-term flicker indicator.) | 1.0 |
| P _{lt} (Long-term flicker indicator.) | 0.65 |
| T _{d(t)} (ms) (Maximum time that d(t) exceeds 3.3%) | 500 |
| d _{max} (%) (Maximum relative voltage change.) | 4 |
| d _c (%) (Relative steady-state voltage change) | 3.3 |

8.3.Test Procedure

- a. The EUT was placed on a wooden table 0.8m above ground.
- b. Configure the EUT and support devices as per section 8.1.
- c. Turn on the EUT and all support devices, and make it run stably.
- d. Set the EUT to produce the most unfavorable sequence of voltage changes under normal operating conditions.
- e. Set correspondent test program and measurement time of the test system to measure the most unfavorable sequence of voltage changes from EUT, and then record the test data.

8.4.Test Results

N/A



9.PERFORMANCE CRITERIA FOR IMMUNITY

The performance criteria are referred to the test standard: EN IEC 61000-6-2


A functional description and a definition of specific performance criteria, during or as a consequence of immunity testing of equipment under test (EUT), shall be provided by the manufacturer and noted in the test report.

- **a)** Performance criterion A: The EUT shall continue to operate as intended during and after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the EUT is used as intended. If the performance level is not specified by the manufacturer, this may be derived from the product description and documentation and what the user may reasonably expect from the equipment if used as intended.
- **b)** Performance criterion B: The EUT shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the EUT is used as intended. The performance level may be replaced by a permissible loss of performance. However, during the test degradation of performance is allowed but no change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the equipment if used as intended.
- **c)** Performance criterion C: Temporary loss of function is allowed during the test, provided the function is self-recoverable or can be restored by the operation of the controls. If, as a result of the application of the tests defined in this standard, the EUT becomes dangerous or unsafe, it shall be deemed to have failed the test.



10.ELECTROSTATIC DISCHARGE TEST

10.1.Block Diagram of Test Setup

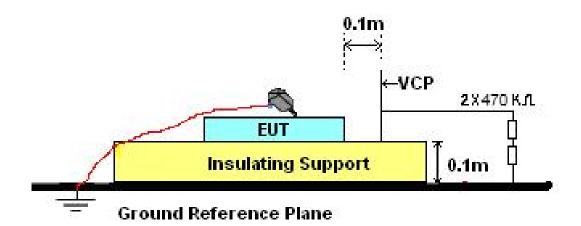

10.2.Test Standard and Severity Levels

a. Test Standard:

| Product standard | EN IEC 61000-6-2 |
|-----------------------|------------------|
| Basic standard | IEC 61000-4-2 |
| Performance criterion | В |

b. Severity Levels:

| Level | Test Voltage Contact Discharge (KV) | Test Voltage Air Discharge (KV) |
|-------|--|------------------------------------|
| 1. | ±2 | ±2 |
| 2. | ±4 | ±4 |
| 3. | ±6 | ±8 |
| 4. | ±8 | ±15 |
| X | Special | Special |



Air Discharge:

Air discharges at slots and apertures and insulating surfaces. On those parts of the EUT where it is not possible to perform contact discharge testing, the equipment should be investigated to identify user accessible points where breakdown may occur. Such points are tested using the air discharge method. This investigation should be restricted to those are normally handled by the user. A minimum of 10 single air discharges shall be applied to the selected test point for each such area.

Contact Discharge:

Contact discharges to the conductive surfaces and coupling planes. The EUT shall be exposed to at least 200 discharges, 100 each at negative and positive polarity, at a minimum of four test points. One of the test points shall be subjected to at least 20 indirect discharges to the center of the front edge of the Horizontal Coupling Plane (HCP). The remaining three test points shall each receive at least 20 direct contact discharges. If no direct contact test points are available, then at least 200 indirect discharges shall be applied in the indirect mode. Test shall be performed at a maximum repetition rate of one discharge per second.

- a. The EUT was placed on a wooden table 0.1m height from the ground.
- b. The EUT was located 0.1m minimum from all side of the HCP (dimensions 1.6m x0.8m).
- c. Configure the EUT and support devices as per section 10.1.
- d. The support units were located 30cm away from the EUT, but direct support unit was/were located at same location as EUT on the HCP and keep at a distance of 10cm with EUT.
- e. Turn on the EUT and all support devices, and make it run stably.
- f. The time interval between two successive single discharges was at least 1 second. Contact discharges were applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.
- g. Air discharges were applied with the round discharge tip of the discharge electrode approaching the EUT as fast as possible (without causing mechanical damage) to touch the EUT. After each discharge, the ESD generator was removed from the EUT and re-triggered for a new single discharge. The test was repeated until all discharges were complete.



- h. At least ten single discharges (in the most sensitive polarity) were applied at the front edge of each HCP opposite the center point of each unit of the EUT and 0.1 meters from the front of the EUT. The long axis of the discharge electrode was in the plane of the HCP and perpendicular to its front edge during the discharges.
- i. At least ten single discharges (in the most sensitive polarity) were applied to the center of one vertical edge of the Vertical Coupling Plane (VCP) in sufficiently different positions that the four faces of the EUT were completely illuminated. The VCP (dimensions 0.5m x 0.5m) was placed vertically to and 0.1 meters from the EUT.
- j. Repeat the above steps in each mode and record the test result.

10.4.Test Results

PASS.

Please refer to the following page.




| Electrostatic Discharge Test Results | | | | |
|--|---------------------------------|--|-----------------------------------|--|
| Ambient Condition: | Temp.: 24.5°C | R.H.: 53% Air Pressure: 103.1 kPa | | |
| | Test level: | ±4 KV for Contact D | ischarge | |
| | rescievei. | ± 8 KV for Air Discharge | | |
| | Discharge impedance: | 330ohm / 150pF | | |
| Test Specifications | No. of discharges: | 10 times at each test point for each polarity at least | | |
| | Polarity: | Positive / Negative | | |
| | Discharge mode: | Single | | |
| | Interval time of discharges: | ≥1s | | |
| Required Performance Criterion | В | | | |
| Tested Mode | Charging Mode Discharging Mode | | | |
| Test Point | | Kind A-Air Discharge C-Contact Discharge | Result (Performance Criterion) | |
| Screen | | A | А | |
| RS485 port | | A | A | |
| indicator light | | A | A | |
| Metal Case | | С | A | |
| Screw | | С | А | |
| Function button | | С | A | |
| Indirect Discharge (VCP) | | С | A | |
| Note: No performance de | gradation or other exceptions o | occurred during and af | ter the test. | |
| Test Engineer: CRB Test Date: 2024.03.29 | | | Test Date: 2024.03.29 | |



11.RADIO-FREQUENCY ELECTROMAGNETIC FIELD TEST

11.1.Block Diagram of Test Setup

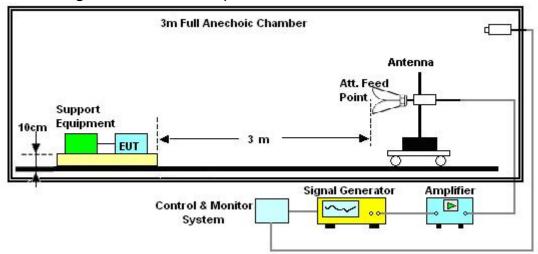

11.2.Test Standard and Severity Levels

a. Test Standard

| Product standard | EN IEC 61000-6-2 |
|-----------------------|------------------|
| Basic standard | IEC 61000-4-3 |
| Performance criterion | A |

b. Severity Levels

| Level | Field Strength (V/m) |
|-------|----------------------|
| 1. | 1 |
| 2. | 3 |
| 3. | 10 |
| 4. | 30 |
| × | Special |



- a. The testing was performed in a fully anechoic chamber.
- b. The EUT and necessary support devices were placed on a turn table which is 0.1 meter above ground.
- c. EUT was set 3 meter away from the transmitting antenna which is mounted on an antenna tower.
- d. Configure the EUT and support devices as per section 11.1.
- e. Turn on the EUT and all support devices, and make it run stably.
- f. Set horizontal and vertical polarization of the antenna to test. Each of the four sides of EUT must be faced this transmitting antenna and measured individually.
- g. Repeat the above steps in each mode and record the test result.

11.4.Test Results

PASS.

Please refer to the following page.




| Radio-Frequency Electromagnetic Field Test Results | | | | |
|--|--------------------------------|-------------------------|---------------------------------|--------------------------------------|
| Ambient Condition | Temp.: 26.5°C | | R.H.: 58.0% | Air Pressure: 101.1kPa |
| | Fielded Strength: | | 10V/m, 3V/m | |
| | Modulation: | | 1kHz sine wave, 80%AM | |
| Test Specifications | Frequency Size: | | 1% of preceding frequency value | |
| | Dwell Time: | | 1s | |
| | Mode: | | Swept test | |
| Required Performance Criterion | A | | | |
| Tested mode | Charging Mode Discharging Mode | | | |
| Frequency (MHz) | Level (V/m) | Antenna polarity | Side | Result (Performance Criterion) |
| | 10 | Horizontal/ Vertical | Front | А |
| | | | Left | А |
| 80-1000 | | | Right | А |
| | | | Back | А |
| 1400-6000 | 3 | Horizontal/ Vertical | Front | А |
| | | | Left | А |
| | | | Right | А |
| | | | Back | А |
| Note: No performance o | legradation or o | ther exceptions | occurred during and after | the test. |
| Test Engineer: CRB Test Date: 2024.03.30 | | | | |



12.FAST TRANSIENTS TEST

12.1.Block Diagram of Test Setup

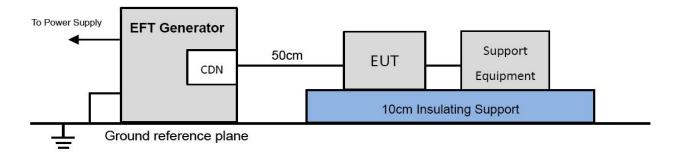

12.2.Test Standard and Severity Levels

a. Test Standard

| Product standard | EN IEC 61000-6-2 |
|-----------------------|------------------|
| Basic standard | IEC 61000-4-4 |
| Performance criterion | В |

b. Severity level

| Level Power ports, earth port (PE) Signal data and control ports Voltage peak kV Repetition frequency kHz Voltage peak kV Repetition frequency kHz 1. 0.5 5 or 100 0.25 5 or 100 2. 1.0 5 or 100 0.5 5 or 100 3. 2.0 5 or 100 1.0 5 or 100 4. 4.0 5 or 100 2.0 5 or 100 X Special Special Special | Open circuit output test voltage and repetition rate of the impulses | | | | |
|---|--|------------------------------|-----------|---------|-----------|
| kV Repetition frequency kHz Voltage peak kV Repetition frequency kHz 1. 0.5 5 or 100 0.25 5 or 100 2. 1.0 5 or 100 0.5 5 or 100 3. 2.0 5 or 100 1.0 5 or 100 4. 4.0 5 or 100 2.0 5 or 100 | | Power ports, earth port (PE) | | | |
| 2. 1.0 5 or 100 0.5 5 or 100 3. 2.0 5 or 100 1.0 5 or 100 4. 4.0 5 or 100 2.0 5 or 100 | Level | <u> </u> | frequency | Y' | frequency |
| 3. 2.0 5 or 100 1.0 5 or 100 4. 4.0 5 or 100 2.0 5 or 100 | 1. | 0.5 | 5 or 100 | 0.25 | 5 or 100 |
| 4. 4.0 5 or 100 2.0 5 or 100 | 2. | 1.0 | 5 or 100 | 0.5 | 5 or 100 |
| | 3. | 2.0 | 5 or 100 | 1.0 | 5 or 100 |
| X Special Special Special Special | 4. | 4.0 | 5 or 100 | 2.0 | 5 or 100 |
| | X | Special | Special | Special | Special |

- Note 1 The use of 5 kHz repetition rates is traditional, however, 100 kHz is closer to reality. Product committees should determine which frequencies are relevant for specific products or product types.
- Note 2 With some products, there may be no clear distinction between power ports and signal ports, in which case it is up to product committees to make this determination for test purposes.
- Note 3 "X" can be any level, above, below or in between the others. The level shall be specified in the dedicated equipment specification.



- a. The EUT was placed on the insulating support 0.1m above the reference ground plane.
- b. Configure the EUT and support devices as per section 12.1.
- c. Turn on the EUT and all support devices, and make it run stably.
- d. For input and output AC power port of the EUT, the EUT was connected to the power mains by using a coupling device which couples the EFT interference signal to AC power lines. The coaxial output of the EFT generator to the terminals on the EUT should not exceed 0.5 meter. Both polarities of the test voltage should be applied during compliance test and the duration of the test is 2 minutes.
- e. For signal ports of the EUT, the EUT was connected to the power mains, and the signal line through a coupling device which couples the EUT interference signal to signal line. Both polarities of the test voltage should be applied during compliance test and the duration of the test is 2 minutes.
- f. Repeat the above steps in each mode and record the test result.

12.4.Test Result

PASS.

Please refer to the following page.




| Fast transients test Results | | | | | |
|--|---|------------------------|-------------------------|--|--|
| Ambient Condition | Temp.: 22.6°C | R.H.: 55% | Air Pressure: 103.3 kPa | | |
| | Test Level: | 1.0 kV for signal port | | | |
| | Repetition Frequency: | 5kHz; | | | |
| Toot Charifications | Duration: | 15ms | | | |
| Test Specifications | Period: | 300ms | | | |
| | Impulse wave shape: | 5/50ns (Tr/Th) | | | |
| | Test Duration: | 2min | | | |
| Required Performance Criterion | В | | | | |
| Test mode | Charging Mode Discharging Mode | | | | |
| | ☐ AC Power ☐ DC port ☒ Signal line | | line | | |
| Coupling mode and port | □ Direct | | | | |
| Test Line | Test Voltage Result (Performance Criterion) | | | | |
| RS485 port | ±1KV A | | | | |
| Note: No performance degradation or other exceptions occurred during and after the test. | | | | | |
| Test Engineer: CRB | | | Test Date: 2024.03.29 | | |



13.SURGE TEST

13.1.Block Diagram of Test Setup

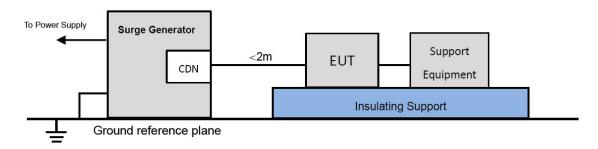

13.2.Test Standard and Severity Levels

a. Test Standard

| Product standard | EN IEC 61000-6-2 | |
|-----------------------|------------------|--|
| Basic standard | IEC 61000-4-5 | |
| Performance criterion | В | |

b. Severity level

| Level | Open-Circuit Test Voltage KV | | |
|-------|---------------------------------|--|--|
| 1. | 0.5 | | |
| 2. | 1.0 | | |
| 3. | 2.0 | | |
| 4. | 4.0 | | |
| * | Special | | |



13.3.Test Procedure

- a. The EUT was placed on the wooden table 0.1m above the ground.
- b. Configure the EUT and support devices as per section 13.1.
- c. Turn on the EUT and all support devices, and make it run stably.
- d. The surge is applied to the EUT power supply terminals via the capacitive coupling network Decoupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines, and to provide sufficient decoupling impedance to the surge wave. The power cord between the EUT and the coupling/decoupling networks was shorter than 2 meters in length.
- e. For test applied to unshielded un-symmetrically operated interconnection lines of EUT, the surge was applied to the lines via the capacitive coupling. The coupling / decoupling networks didn't influence the specified functional conditions of the EUT. The interconnection line between the EUT and the coupling/decoupling networks was shorter than 2 meters in length.
- f. For test applied to unshielded symmetrically operated interconnection / telecommunication lines of EUT, the surge was applied to the lines via gas arrestors coupling. Test levels below the ignition point of the coupling arrestor were not specified. The interconnection line between the EUT and the coupling/decoupling networks was shorter than 2 meters in length.
- g. Five positive and five negative (polarity) pulses at specified phase angles with a1min repetition rate are conducted during test.
- h. Repeat the above steps in each mode and record the test result.


13.4.Test Result

N/A



14.RADIO-FREQUENCY COMMON MODE TEST

14.1.Block Diagram of Test Setup

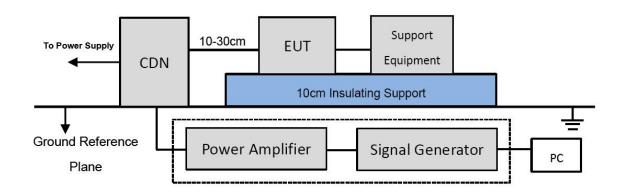

14.2.Test Standard and Severity Levels

a. Test Standard

| Product standard EN IEC 61000-6-2 | |
|-----------------------------------|---------------|
| Basic standard | IEC 61000-4-6 |
| Performance criterion | A |

b. Severity level

| Level | Field Strength (V) | | |
|-------|--------------------|--|--|
| 1. | 1 | | |
| 2. | 3 | | |
| 3. | 10 | | |
| X | Special | | |



14.3.Test Procedure

- a. The EUT was placed on the insulating support 0.1m above the ground reference plane. CDN (coupling and decoupling device) or EM clamp is placed on the ground plane about 0.3m from EUT. Cables between CDN or EM clamp and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).
- b. Configure the EUT and support devices as per section 14.1.
- c. Turn on the EUT and all support devices, and make it run stably.
- d. The disturbance signal described below is injected to EUT through CDN or EM clamp.
- e. The frequency range is swept from 150 KHz to 80 MHz using 10V signal level, and with the disturbance signal 80% amplitude modulated with a 1kHz sine wave. The rate of sweep shall not exceed 1.5*10-3decades/s. Where the frequency is swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.
- f. Repeat the above steps in each mode and record the test result.

14.4.Test Result

PASS.

Please refer to the following page.




| Radio-Frequency Common Mode Test Results | | | | | | |
|--|--|------------------------|---------------------------------|--|--|--|
| Ambient Condition | Temp.: 26.8°C R.H.: 58.3% Air Pressure: 101.2 k | | | | | |
| | Test Level: | 10V | 10V | | | |
| | Modulation: | 1kHz sine wave, 80% | 1kHz sine wave, 80%AM | | | |
| Test Specifications | Step Size: | 1% of preceding freque | 1% of preceding frequency value | | | |
| | Dwell Time: | 1s | 1s | | | |
| | Mode: | Swept test | Swept test | | | |
| Required Performance Criterion | A | 1 | | | | |
| Test mode | Charging Mode | | | | | |
| | Discharging Mode | | | | | |
| Test Port | Frequency (MHz) Level(V) Result (Performance Criterion | | | | | |
| RS485 port | 0.15~80 10 A | | | | | |
| Note: No performance | degradation or other | exceptions occurred du | ring and after the test. | | | |
| Test Engineer: CRB | | | Test Date: 2024.03.30 | | | |



15.POWER-FREQUENCY MAGNETIC FIELD TEST

15.1.Block Diagram of Test Setup

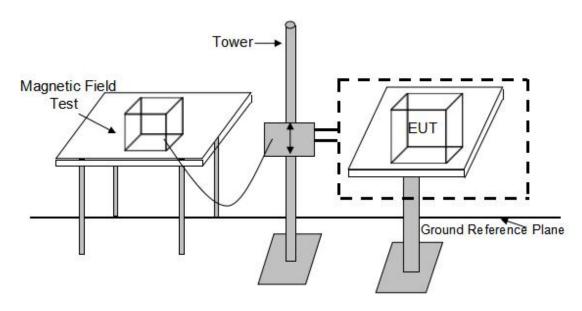

15.2.Test Standard and Severity Levels

a. Test Standard

| Product standard | EN IEC 61000-6-2 |
|-----------------------|------------------|
| Basic standard | IEC 61000-4-8 |
| Performance criterion | A |

b. Severity level

| Level | Magnetic Field Strength A/m |
|-------|-----------------------------|
| 1. | 1 |
| 2. | 3 |
| 3. | 10 |
| 4. | 30 |
| 5. | 100 |
| X | Special |



15.3.Test Procedure

- a. The EUT was placed on the middle of an induction coil(1*1m), under which is a0.1m-thick insulating support.
- b. Configure the EUT and support devices as per section 15.1.
- c. All cables of the EUT were exposed to the magnetic field for 1m of their length.
- d. X, Y and Z polarization of the induction coil are set on test, so that each side of the E.U.T. is affected by the magnetic field. If not possible as the EUT size, change the position of the EUT is permitted.
- e. Repeat the above steps in each mode and record the test result.


15.4.Test Result

N/A



16.VOLTAGE DIPS AND INTERRUPTIONS TEST

16.1.Block Diagram of Test Setup

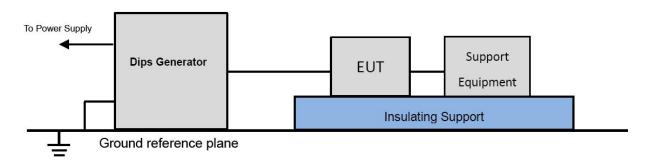

16.2.Test Standard and Severity Levels

a. Test Standard

| Product standard | EN IEC 61000-6-2 |
|-----------------------|------------------|
| Basic standard | IEC 61000-4-11 |
| Performance criterion | B&C |

b. Severity level

| Class | Test level and durations for voltage dips (t _s)(50Hz/60Hz) | | | | | | |
|----------------------|--|-----------------------|--|--|--|--|--|
| Class 1 | Class 1 Case-by-case according to the equipment requirements | | | | | | |
| Class 2 | 0 % during 1/2 cycle | 0 % during 1 cycle | 70 % during 25/30 ^b cycles | | | | |
| Class 3 | 0 % during 1/2 cycle | 0 % during 1 cycle | 40 %c during 70 % during 80 % during 10/12b cycles 25/30b cycles 250/300b cycles | | | | |
| Class X ^a | X | Х | X X X | | | | |

Note: a. To be defined by product committee. For equipment connected directly or indirectly to the public network, the levels must not be less severe than Class 2.

- b. "25/30 cycles" means "25 cycles for 50 Hz test" and "30 cycles for 60 Hz test", "10/12 cycles" means "10 cycles for 50 Hz test" and "12 cycles for 60 Hz test" and "250/300 cycles" means "250 cycles for 50 Hz test" and "300 cycles for 60 Hz test".
- c. May be replaced by product committee with a test level of 50 % for equipment that is intended primarily for 200 V or 208V nominal operation.



| Class | Test level and durations for short interruptions (t _s) (50 Hz/60 Hz) | | | | | |
|----------------------|--|---|---|---|---|--|
| Class 1 | Case-by-case according to the equipment requirements | | | | | |
| Class 2 | 0 % during 250/300 ^b cycles | | | | | |
| Class 3 | 0 % during 250/300 ^b cycles | | | | | |
| Class X ^a | Х | Х | Х | Х | Х | |

Note: a. To be defined by product committee. For equipment connected directly or indirectly to the public network, the levels must not be less severe than Class 2.

b. "250/300 cycles" means "250 cycles for 50 Hz test" and "300 cycles for 60 Hz test".

16.3.Test Procedure

- a. The EUT was placed on the wooded table 0.1m above the ground.
- b. Configure the EUT and support devices as per section 16.1.
- c. Setting the parameter of tests and then perform the test software of test simulator.
- d. Conditions changes to occur at 0 and 180 degree crossover point of the voltage waveform.
- e. Repeat the above steps in each mode and record the test result.

16.4.Test Result


N/A



APPENDIX I (PHOTOS OF TEST SETUP)



Photos of Test Setup

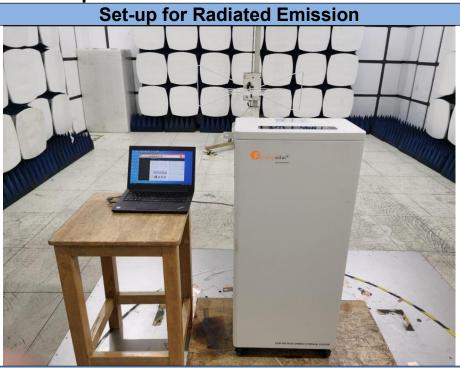








Set-up for EFT Immunity



Set-up for Radio-Frequency Electromagnetic Field





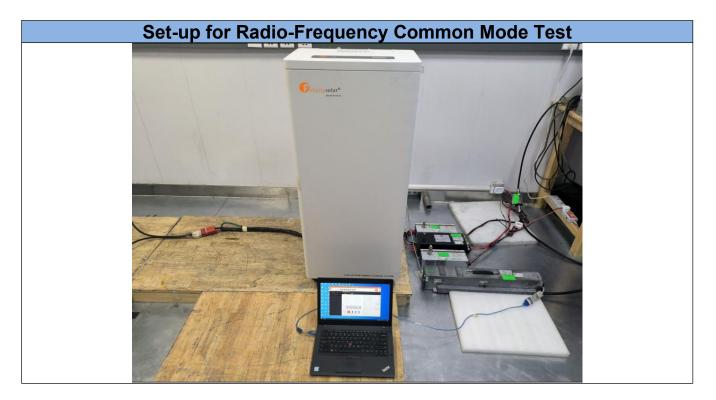



APPENDIX II (PHOTOS OF E.U.T)



Photos of the EUT





Over view -2





Over view -3



Over view -4






Internal View -1




Internal View -2






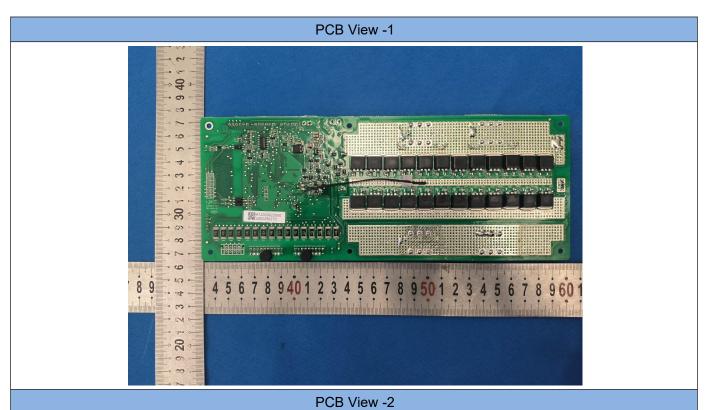

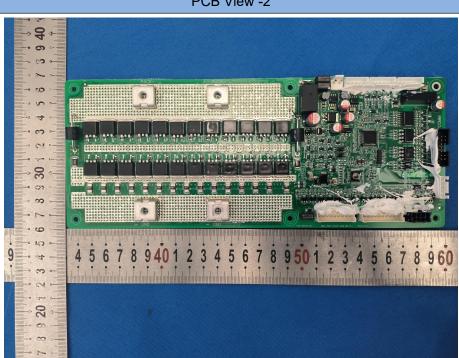





PCB View -3

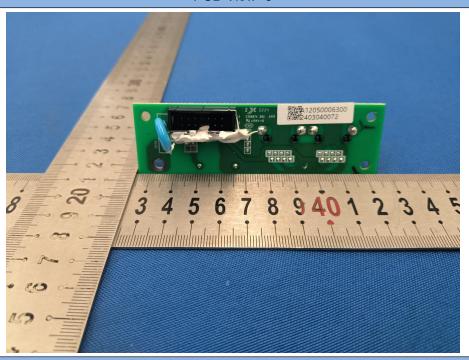


PCB View -4

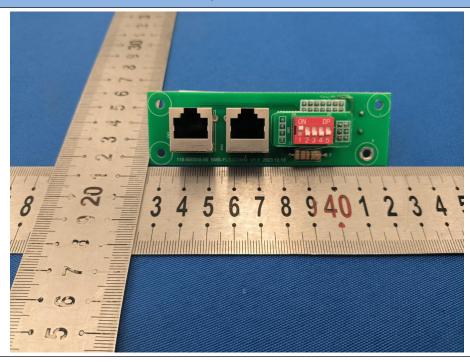




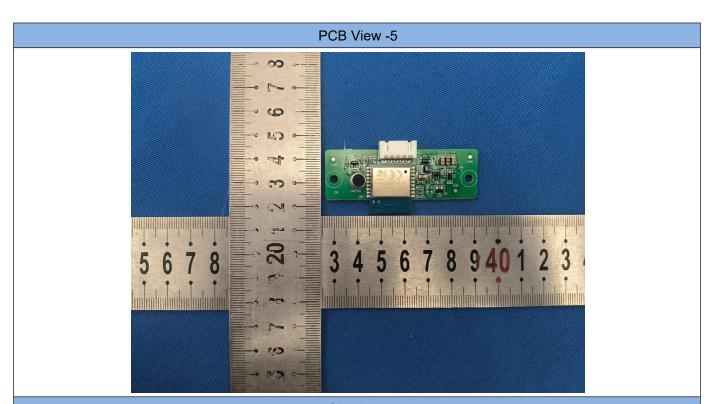

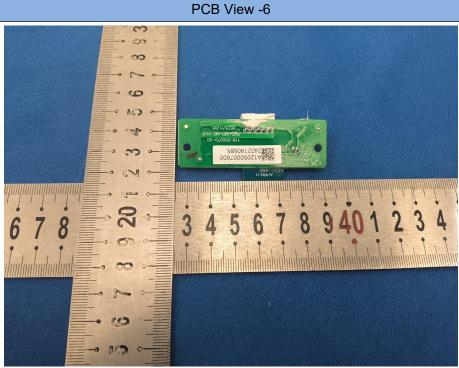



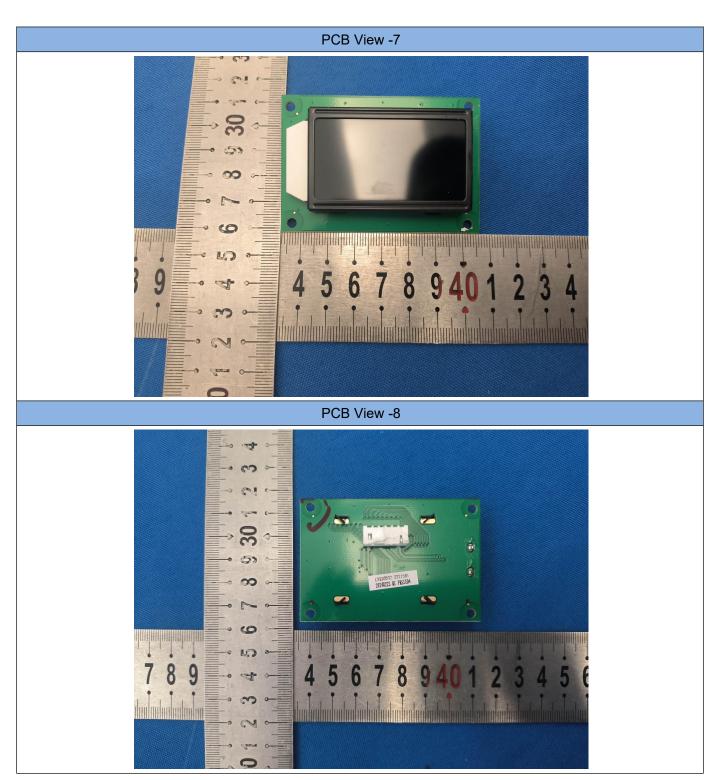

--- End of the report ---